

SERIES 400

Anti-Ligature Linear



OVERVIEW

The Series 400 is a surface mounted anti-ligature linear luminaire, with a robust 3mm white painted steel housing, for use in secure healthcare applications. Available in two different sizes, 4ft and 5ft, each with three output options, Series 400 also has a choice of three colour temperatures. Alongside these basic features, Series 400 has a variety of dimming and emergency options, providing excellent flexibility in this challenging application.

FEATURES

- Anti-Ligature design to prevent self harming
- 2 sizes and 3 output options, make it suitable for a myriad of uses
- Premium European drivers from VS, Osram and Tridonic
- Emergency plug and play options

OPTIONS

- 3000, 4000K & 5700K
- 2 size options 1200mm (4ft) & 1500mm (5ft)
- 4ft with 2400, 4800 & 6600 lumen output
- 5ft with 3840, 6400 & 8800 lumen output
- Dimming control via Dali or wireless via Bluetooth
- Emergency self-test or manual versions



T: 01282 476600 | E: info@photoniclighting.co.uk


Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk

SERIES 400

Anti-Ligature Linear

PRODUCT DIMENSIONS

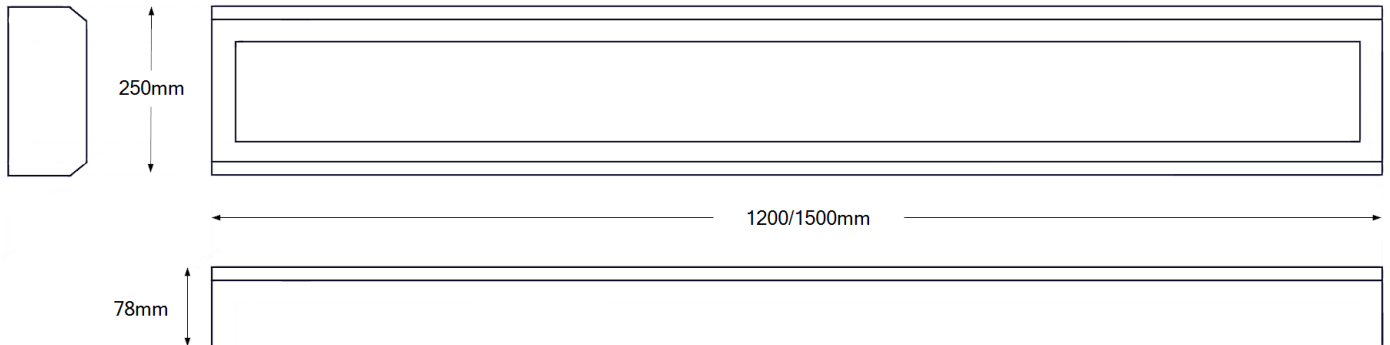

PHOTOMETRIC

PRODUCT SPECIFICATION

400 - (SZ) - (LM) - (CCT) - W - (CTR) - (EM)

Size (SZ)	
Code	Description
4	4FT
5	5FT

Lumen Output (LM)	
Code	Description
Lo	Lo output = 2386lm/m
Std	Std output = 3977lm/m
Hi	Hi output = 5541lm/m

Correlated Colour Temperature (CCT)	
Code	Description
830	3000K 80 CRI
840	4000K 80 CRI
857	5700K 80 CRI

Control (CTR)	
Code	Description
N	Non dim
D	DALI
RD	Retractive Dim
10	1-10v dimming

Emergency (EM)	
Code	Description
L3	3W Lithium
SL3	3W Self test lithium
DE3	DALI 3W emergency

T: 01282 476600 | E: info@photonighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photonighting.co.uk