Downlights





OVERVIEW

Series 830 is a Ø70mm IP54 rated downlight with up to 750lm. Available in 80CRI in both 3000K & 4000K, with numerous different control options. Series 830 utilises a 36° injection moulded faceted reflector with a die cast bezel available in White & Black. This is a made to order product.

FEATURES

- IP54 rated
- >50,000 hours lifetime
- 5 year warranty
- 3000K & 4000K

OPTIONS

- DALI or Casambi options available
- Emergency options available























T: 01282 476600 | E: info@photoniclighting.co.uk
Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH


www.photoniclighting.co.uk

SERIES 830


Downlights



PRODUCT DIMENSIONS

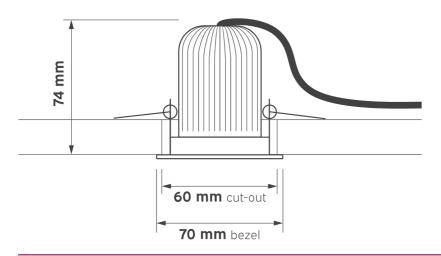

PHOTOMETRIC



PRODUCT SPECIFICATION

Lumen Output (LM)	
Code	Description
7	750lm

Control (CTR)		
Code	Description	
N	Switched	
PHD	Phase Dim	
D	DALI	
RD	Retractive Dim	
BC	Bluetooth Casambi	

Correlat	Correlated Colour Temperature (CCT)	
Code	Description	
830	80 CRI 3000K	
840	80 CRI 4000K	

Emergency (EM)		
Code	Description	
L3	3W Emergency	
DE3	Dali 3W Emergency	

	Colour (CR)		
Code	Description		
W	White		
В	Black		

T: 01282 476600 | E: info@photoniclighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk

SERIES 830

Downlights



OPTIONS





T: 01282 476600 | E: info@photoniclighting.co.uk
Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk