



OVERVIEW


Series 832 is a high performance square downlight with various output options up to 4800lm. The luminaire uses a highly specular reflector to provide high efficiency. The Bezel is made from high quality die cast material and has the ability to add accessories as required. Series 832 has a lifetime rating of >60,000 hours @ L70 utilising high quality LED and driver technology. This is a made to order product.

FEATURES

- IP20
- >60,000 hours @ L70
- Various output choices

OPTIONS

- 3000K or 4000K
- Emergency options
- DALI, Casambi and other dimming options.




Made
To
Order


SERIES 832

Downlights

PRODUCT DIMENSIONS

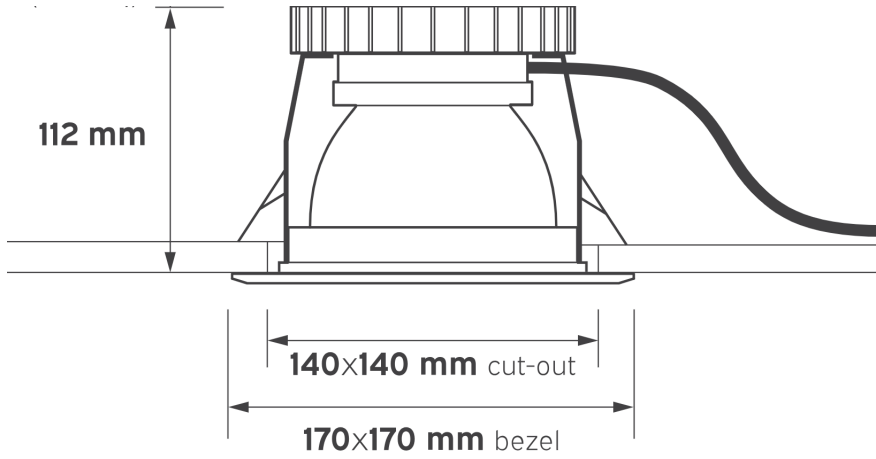

PHOTOMETRIC

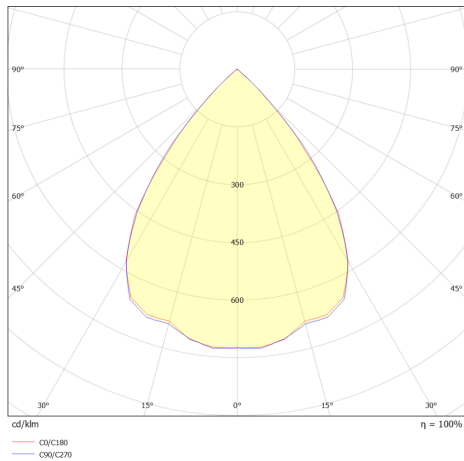

T: 01282 476600 | E: info@photoniclighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk

SERIES 832

Downlights

PRODUCT SPECIFICATION

832 - (LM) - (CCT) - (CR) - (BA) - (CTR) - (EM)

Lumen Output (LM)	
Code	Description
10	1075lm (11W)
20	2075lm (20W)
30	3075lm (30W)
48	4800lm (47W)

Correlated Colour Temperature (CCT)	
Code	Description
830	80 CRI 3000K
840	80 CRI 4000K



Colour (CR)	
Code	Description
W	White

Beam Angle (BA)	
Code	Description
SPE	Specular reflector
CA	Clear Acrylic
OA	Opal Acrylic
CAH	Clear Acrylic Halo
OAH	Opal Acrylic Halo

Control (CTR)	
Code	Description
N	Switched
PHD	Phase Dim
D	DALI
RD	Retractive Dim
BC	Bluetooth Casambi

Emergency (EM)	
Code	Description
L3	3W Emergency
DE3	Dali 3W Emergency

OPTIONS

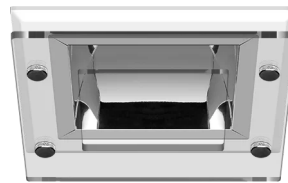

T: 01282 476600 | E: info@photonicleighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photonicleighting.co.uk