

SERIES 840

Downlights

PHOTONIC.
LIGHTING SOLUTIONS



OVERVIEW

Series 840 is a compact fire rated IP65 LED downlight, accredited fire rating FR30, FR60 and FR90*. The Luminaire is Ø85mm with a depth of only 60mm and is supplied with an IP ceiling gasket. Series 840 has an output of 750lm from 8W of power. The luminaire is available in a choice of CCT and has a choice of bezel options. This is a made to order product. *Fire rating in accordance with BS 476:Part 21:1987, load bearing timber floor with softwood timber joists.

FEATURES

- Lifetime >50,000 hours @ L70
- IP65
- Fire rating FR30, FR60, FR90*

OPTIONS

- 3000K & 4000K
- DALI & Wireless Casambi options
- Emergency options
- Multiple Bezel options



T: 01282 476600 | E: info@photoniclighting.co.uk


Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk


SERIES 840

Downlights

PRODUCT DIMENSIONS

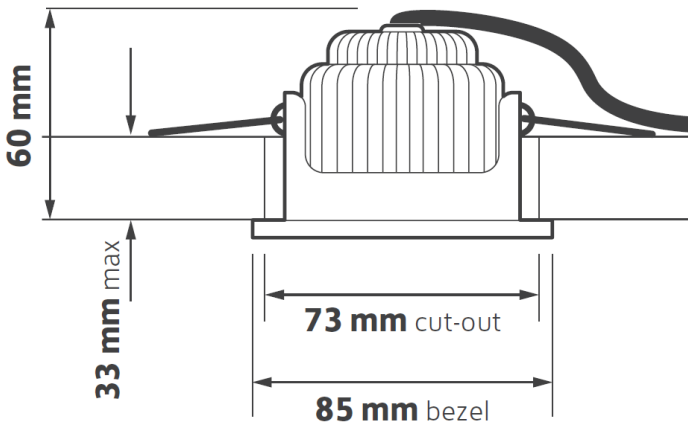

PHOTOMETRIC

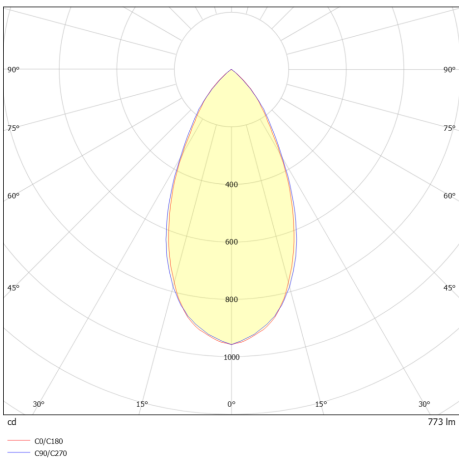

T: 01282 476600 | E: info@photoniclighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk

PRODUCT SPECIFICATION

840 - (LM) - (CCT) - (CR) - (CTR) - (EM)

Lumen Output (LM)		Correlated Colour Temperature (CCT)		Colour (CR)	
Code	Description	Code	Description	Code	Description
8	800 Lumens (8W)	830	80 CRI 3000K	W	White Bezel
		840	80 CRI 4000K	B	Black Bezel
				SBR	Steel Brushed Bezel

Control (CTR)		Emergency (EM)	
Code	Description	Code	Description
N	Non Dimmable	L3	Lithium 3W Emergency
PHD	Phase cut Dimmable	SL3	Self test Lithium 3W Emergency
RD	Retractive Dim	DE3	Dali Emergency
D	Dali Dim		
BC	Bluetooth Casambi		

OPTIONS

