Downlights





OVERVIEW

Series 840 is a compact fire rated IP65 LED downlight, accredited fire rating FR30, FR60 and FR90*. The Luminaire is Ø85mm with a depth of only 60mm and is supplied with an IP ceiling gasket. Series 840 has an output of 750lm from 8W of power. The luminaire is available in a choice of CCT and has a choice of bezel options. *Fire rating in accordance with BS 476:Part 21:1987, load bearing timber floor with softwood timber joists.

FEATURES

- Lifetime >50,000 hours @ L70
- IP65
- Fire rating FR30, FR60, FR90*

OPTIONS

- 3000K & 4000K
- DALI & Wireless Casambi options
- · Emergency options
- Multiple Bezel options



















T: 01282 476600 | E: info@photoniclighting.co.uk
Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH


www.photoniclighting.co.uk

SERIES 840


Downlights



PRODUCT DIMENSIONS

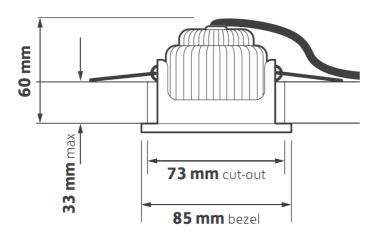

PHOTOMETRIC



SERIES 840

Downlights



PRODUCT SPECIFICATION

840 - (LM) - (CCT) - (CR) - (CTR) - (EM)

Lumen Output (LM)	
Code	Description
8	800 Lumens (8W)

Control (CTR)		
Code	Description	
N	Non Dimmable	
PHD	Phase cut Dimmable	
RD	Retractive Dim	
D	Dali Dim	
BC	Bluetooth Casambi	

Correlated Colour Temperature (CCT)	
Code	Description
830	80 CRI 3000K
840	80 CRI 4000K

Emergency (EM)		
Code	Description	
L3	Lithium 3W Emergency	
SL3	Self test Lithium 3W Emergency	
DE3	Dali Emergency	

Colour (CR)		
Code	Description	
W	White Bezel	
В	Black Bezel	
SBR	Steel Brushed Bezel	

OPTIONS





T: 01282 476600 | E: info@photoniclighting.co.uk
Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk