


# SERIES 230

## Retrofit Trunking

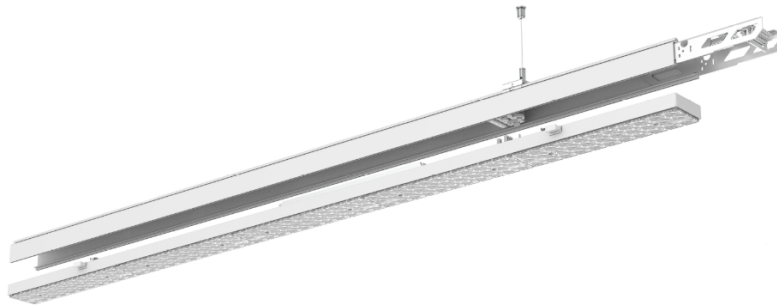

### OVERVIEW

Series 230 is a highly flexible retrofit trunking solution for all the major lighting trunking brands. Old lighting technology can easily be upgraded to LED on the existing trunking system without the need for any tools or alterations. The LED module has multiple options for light distribution and is highly efficient, ensuring the right amount of light is placed exactly where required. Series 230 can also incorporate new control protocols such as D4i and Casambi ensuring the lighting system is up to date with latest technologies. Major trunking brands included also available compatibility with Regiolux, Fluolite, Ridi, Kandem, Ludwig, Veko, Siteco, Norton, AEG. Contact for more details. This is a made to order product.

### FEATURES

- 160-170lm/W
- L80 @80,000 hours
- Multiple beam angles for distribution control
- Quick retrofit, tool free install
- Major brands including Trilux, Philips & Zumtobel included.
- 5 Year warranty

### OPTIONS

- Dimming control and emergency options available
- Emergency options available
- Optional Sensors



T: 01282 476600 | E: [info@photoniclighting.co.uk](mailto:info@photoniclighting.co.uk)


Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

[www.photoniclighting.co.uk](http://www.photoniclighting.co.uk)

# SERIES 230


## Retrofit Trunking

### PRODUCT DIMENSIONS



Model number	Brand	Lamp type	Dimension (L)
TE5	Trilux E-line	T5	1474mm
TE8	Trilux E-line	T8	1530mm
PT8	Philips Maxos	T8	1528mm
PM5	Philips Maxos	T5	1479mm
TTX400.8	Philips TTX400	T8	1528mm
TTX400.5	Philips TTX400	T5	1479mm
TTX200	Philips TTX200	T8	1528mm
ZT8	Zumtobel Tecton	T8	1500mm
ZZ8, ZZ5, ZZ8.1, ZZ5.1	Zumtobel ZX2	T8 & T5	1526mm

### PHOTOMETRIC

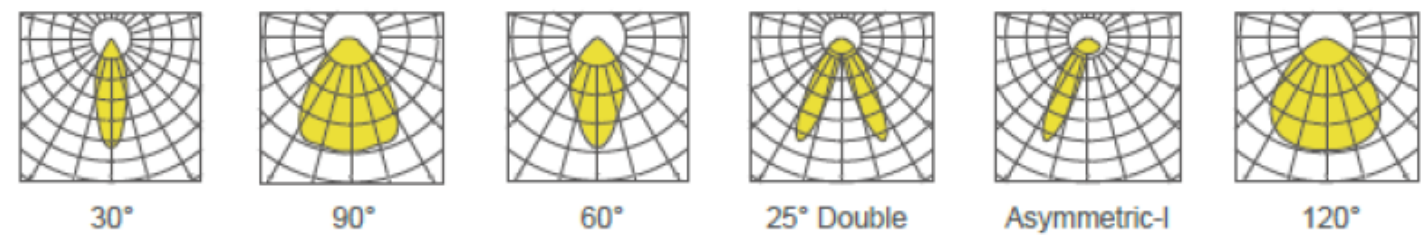

### PRODUCT SPECIFICATION

230 - (TN) - (BA) - (CCT) - (CTRL) - (EM)

Trunk Name (TN)	
Code	Description
TE5	Trilux E-line T5
TE8	Trilux E-line T8
PT8	Philips Maxos T8
PM5	Philips Maxos T5
TTX400.8	Philips TTX400 T8
TTX400.5	Philips TTX400 T5
TTX200	Philips TTX200 T8
ZT8	Zumtobel tecton T8
ZZ8	Zumtobel ZX2 & ZX1 (new) T8
ZZ5	Zumtobel ZX2 & ZX1 (new) T5
ZZ8.1	Zumtobel ZX2 & ZX1 (old) T8
ZZ5.1	Zumtobel ZX2 & ZX1 (old) T5

Beam Angle (BA)	
Code	Description
30	30° distribution
60	60° distribution
90	90° distribution
25D	25° double distribution
ASY	Asymmetric distribution
120	120° distribution
30x90	30°x90° distribution

Control (CTRL)	
Code	Description
N	Switched
D	DALI
RD	Retractive Dim
10	1-10v dimming
BC	Bluetooth Casambi

Correlated Colour Temperature (CCT)	
Code	Description
830	80 CRI 3000K
840	80 CRI 4000K
850	80 CRI 5000K
865	80 CRI 6500K

Emergency (EM)	
Code	Description
L3	3W Lithium
SL3	3W Litium Self-test

T: 01282 476600 | E: info@photonighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photonighting.co.uk

# SERIES 230

## Retrofit Trunking

**PHOTONIC.**  
LIGHTING SOLUTIONS

### OPTIONS



T: 01282 476600 | E: [info@photoniclighting.co.uk](mailto:info@photoniclighting.co.uk)

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

[www.photoniclighting.co.uk](http://www.photoniclighting.co.uk)