

OVERVIEW


A modern range of recessed or surface mount modular luminaires for use in vulnerable or wet areas. The luminaire uses hi quality Tridonic LEDs and Tridonic Driver combination in an IP65 sealed facia. The body is made from powder coated mild steel with side arm suspension brackets for mounting in most ceiling types. The TPa Polycarbonate diffuser is mounted in a sealed front frame attached to the fitting body. This is a made to order product.

FEATURES

- Up to 180lm/W
- IP65
- 50,000 hours L70 @25°C
- 5 year warranty

OPTIONS

- Emergency options available
- Multiple control options
- 600x600mm & 1200x600mm size options




Made
To
Order

T: 01282 476600 | E: info@photoniclighting.co.uk


Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk

PRODUCT DIMENSIONS

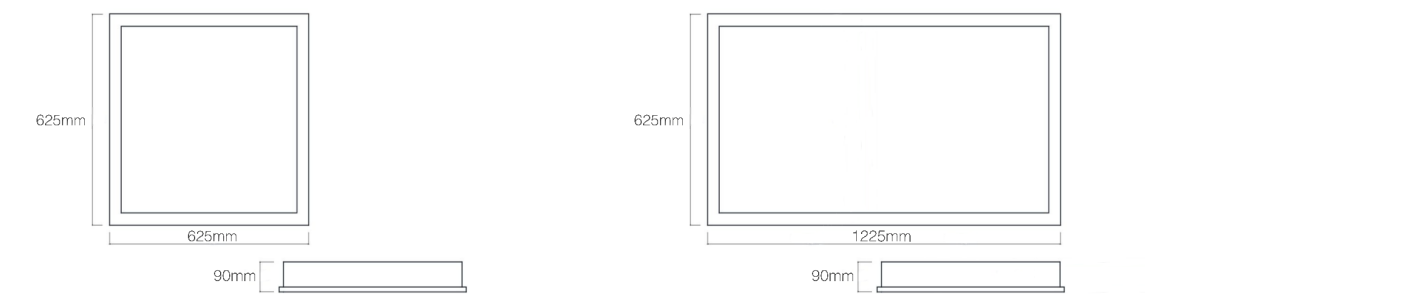

PHOTOMETRIC

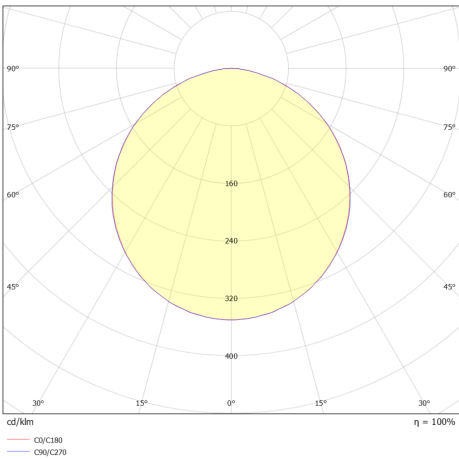

PRODUCT SPECIFICATION

30 - (SZ) - (LM) - (CCT) - (CTRL) - (EM)

Size (SZ)	
Code	Description
66	600x600mm Panel
126	1200x600mm panel

Lumens (LM)	
Code	Description
48	4800 lumens (66 only, 27W)
58	5800 lumens (126 only, 35W)

Correlated Colour Temperature (CCT)	
Code	Description
830	80 CRI 3000K
840	80 CRI 4000K

Control (CTRL)	
Code	Description
N	Switched
D	DALI
RD	Retractive Dim

Emergency (EM)	
Code	Description
L3	3W Lithium
SL3	3W Litium Self-test

SERIES 30

Panels

OPTIONS



T: 01282 476600 | E: info@photoniclighting.co.uk

Unit 1 Boran Court, Network 65, Hapton, Burnley BB11 5TH

www.photoniclighting.co.uk